




400 x  
400 mm | Heavy Duty  
PARKING VITRIFIED | 12 mm  
THICKNESS

INTERIOR  
**IN &  
OUT**  
EXTERIOR

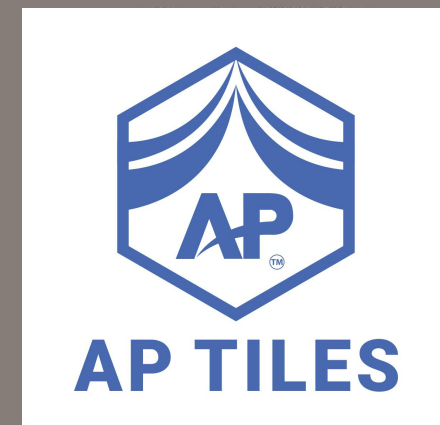

HEAVY DUTY | VITRIFIED BODY

DIGITAL PARKING TILES

400x400 mm



# ELEGANT STRENGTH

Why do beauty and strength have to be a matter of choice? Do we really have to let go of one to choose the other? why can't they exist in harmony? At Corona we set out to find answers to these questions. And the quest came to a fruitful culmination with the 1.2cm In & Out Collection. They are Matt Parking Vitrified Tiles Which means they are robust, skid-resistant, and all-enduring. It comes in a series of exotic design categories Making them a practical and sensible alternative to actual stone, wood, cement slate etc.

## Maximum Variety Minimum Care

The range has been conceived as a range of art Decor tiles. with every collection Altogether, they help you create that stately, heritage look for your living space. And just as their beauty begins to cast a spell on you, their sheer strength and endurance gives you a sense of reassurance only a few tiles in its category could afford. And it is this quality of being beautiful inside out is what makes it ideal for high-traffic areas like Malls, Retail Showrooms, or even your dream home. come see for yourself, a revelation of beauty and strength, ready to permeate every aspect of your living spaces.



## AP TILES



## PLAIN SERIES

OUTDOOR HEAVY DUTY  
DIGITAL FLOOR TILES  
400x400mm



Anti Skid



Wear Resistance



High Flexural  
Strength



Fire Resistance



Chromatic  
Properties



Eco Friendly



Chemical  
Resistance




Frost  
Resistance

400  
X400


**PLAIN**  
SERIES



**AP TILES**

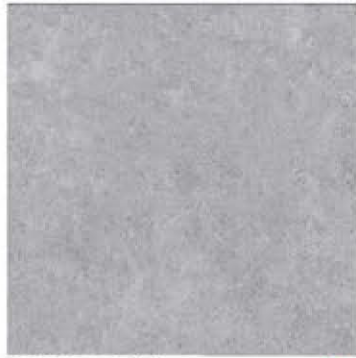

PISTA LIGHT

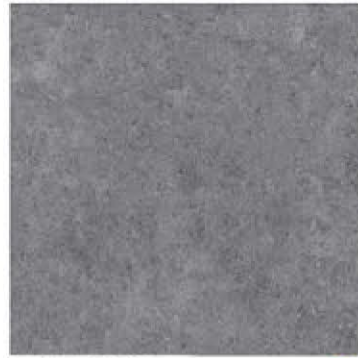


PISTA DARK



*creative thinking inspires ideas*

400  
X400

PLAIN  
SERIES

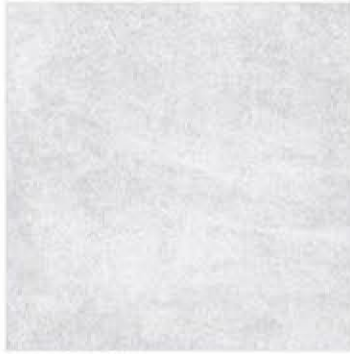

CARIO GREY



CARIO NERO



MELT BIANCO



MELT BROWN




SPIRO GREY



SPIRO BLUE



AP TILES

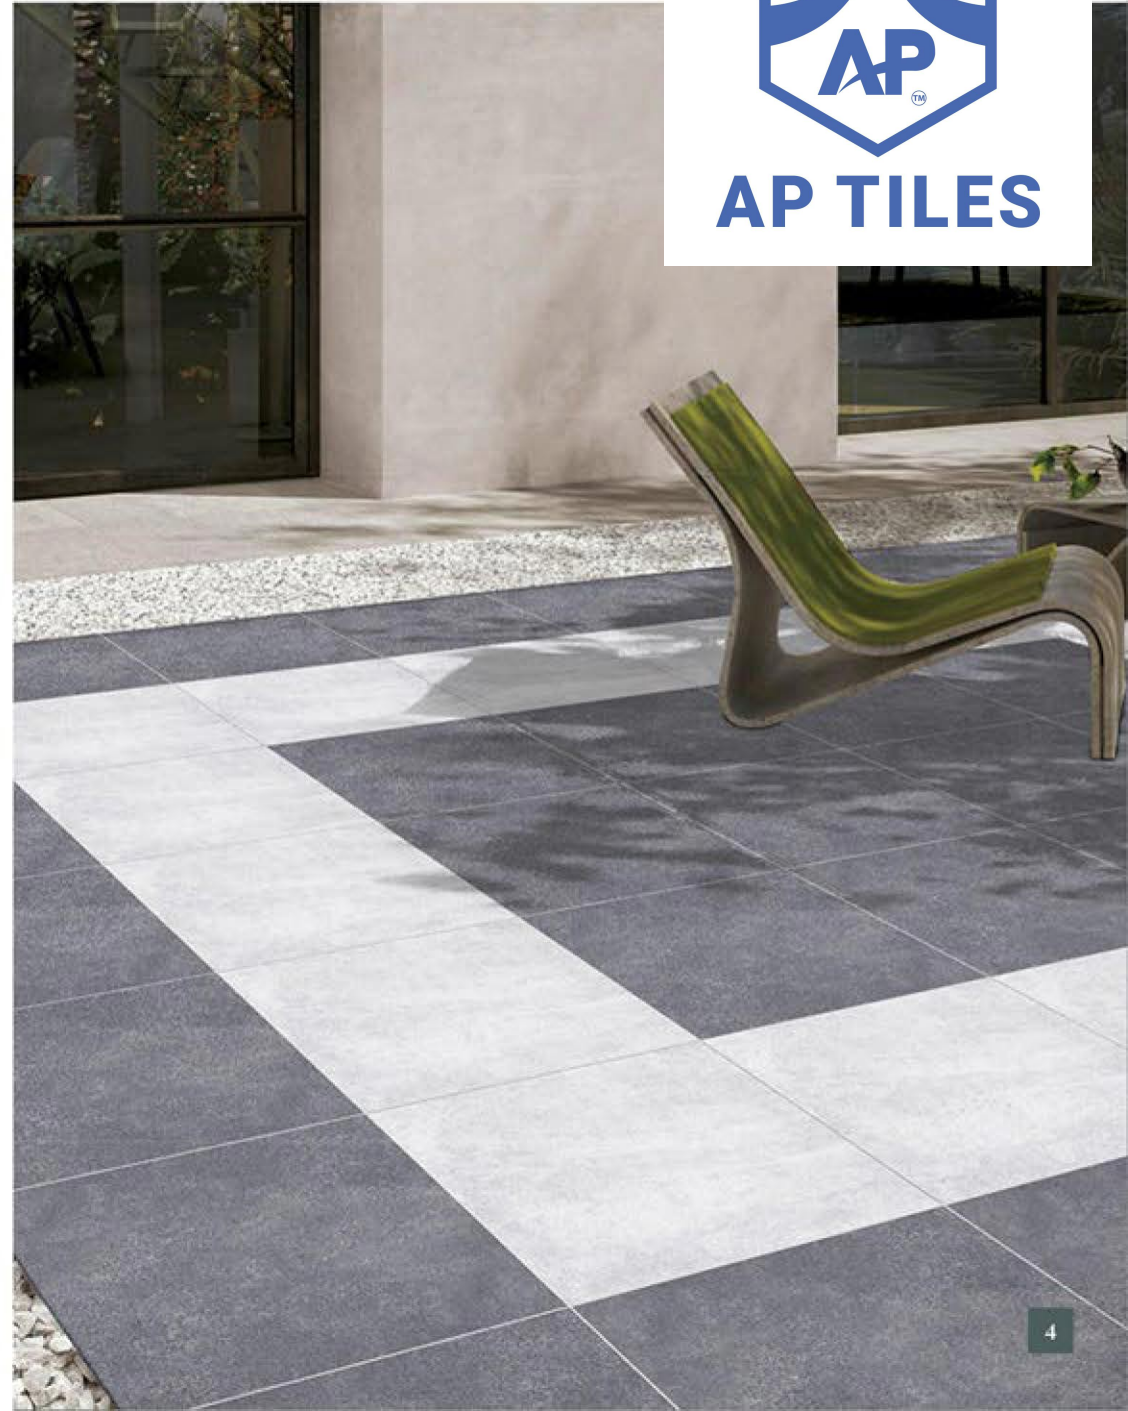

*Creative thinking inspires ideas.*

400  
X400

**PLAIN**  
SERIES



**AP TILES**



PARK LIGHT



PARK DARK



400  
X400


PLAIN  
SERIES



BENITO IVORY



BENITO YELLOW

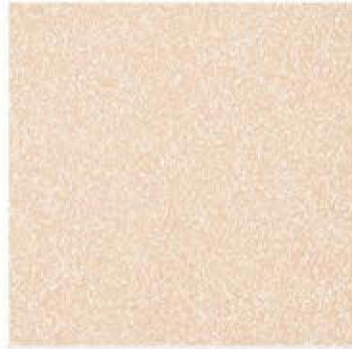

COSTA BEIGE



COSTA BROWN



AGRO IVORY



AGRO YELLOW



AP TILES




*Creative thinking inspires ideas.*

400  
X400


PLAIN  
SERIES




AP TILES

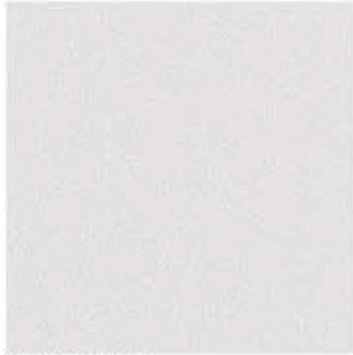


RAPID WHITE

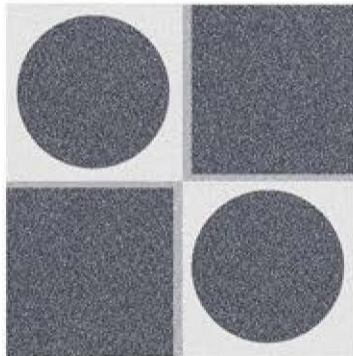

RAPID BLACK

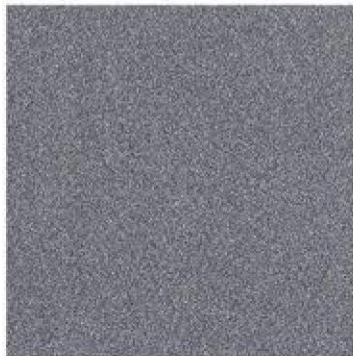

RAPID DARK

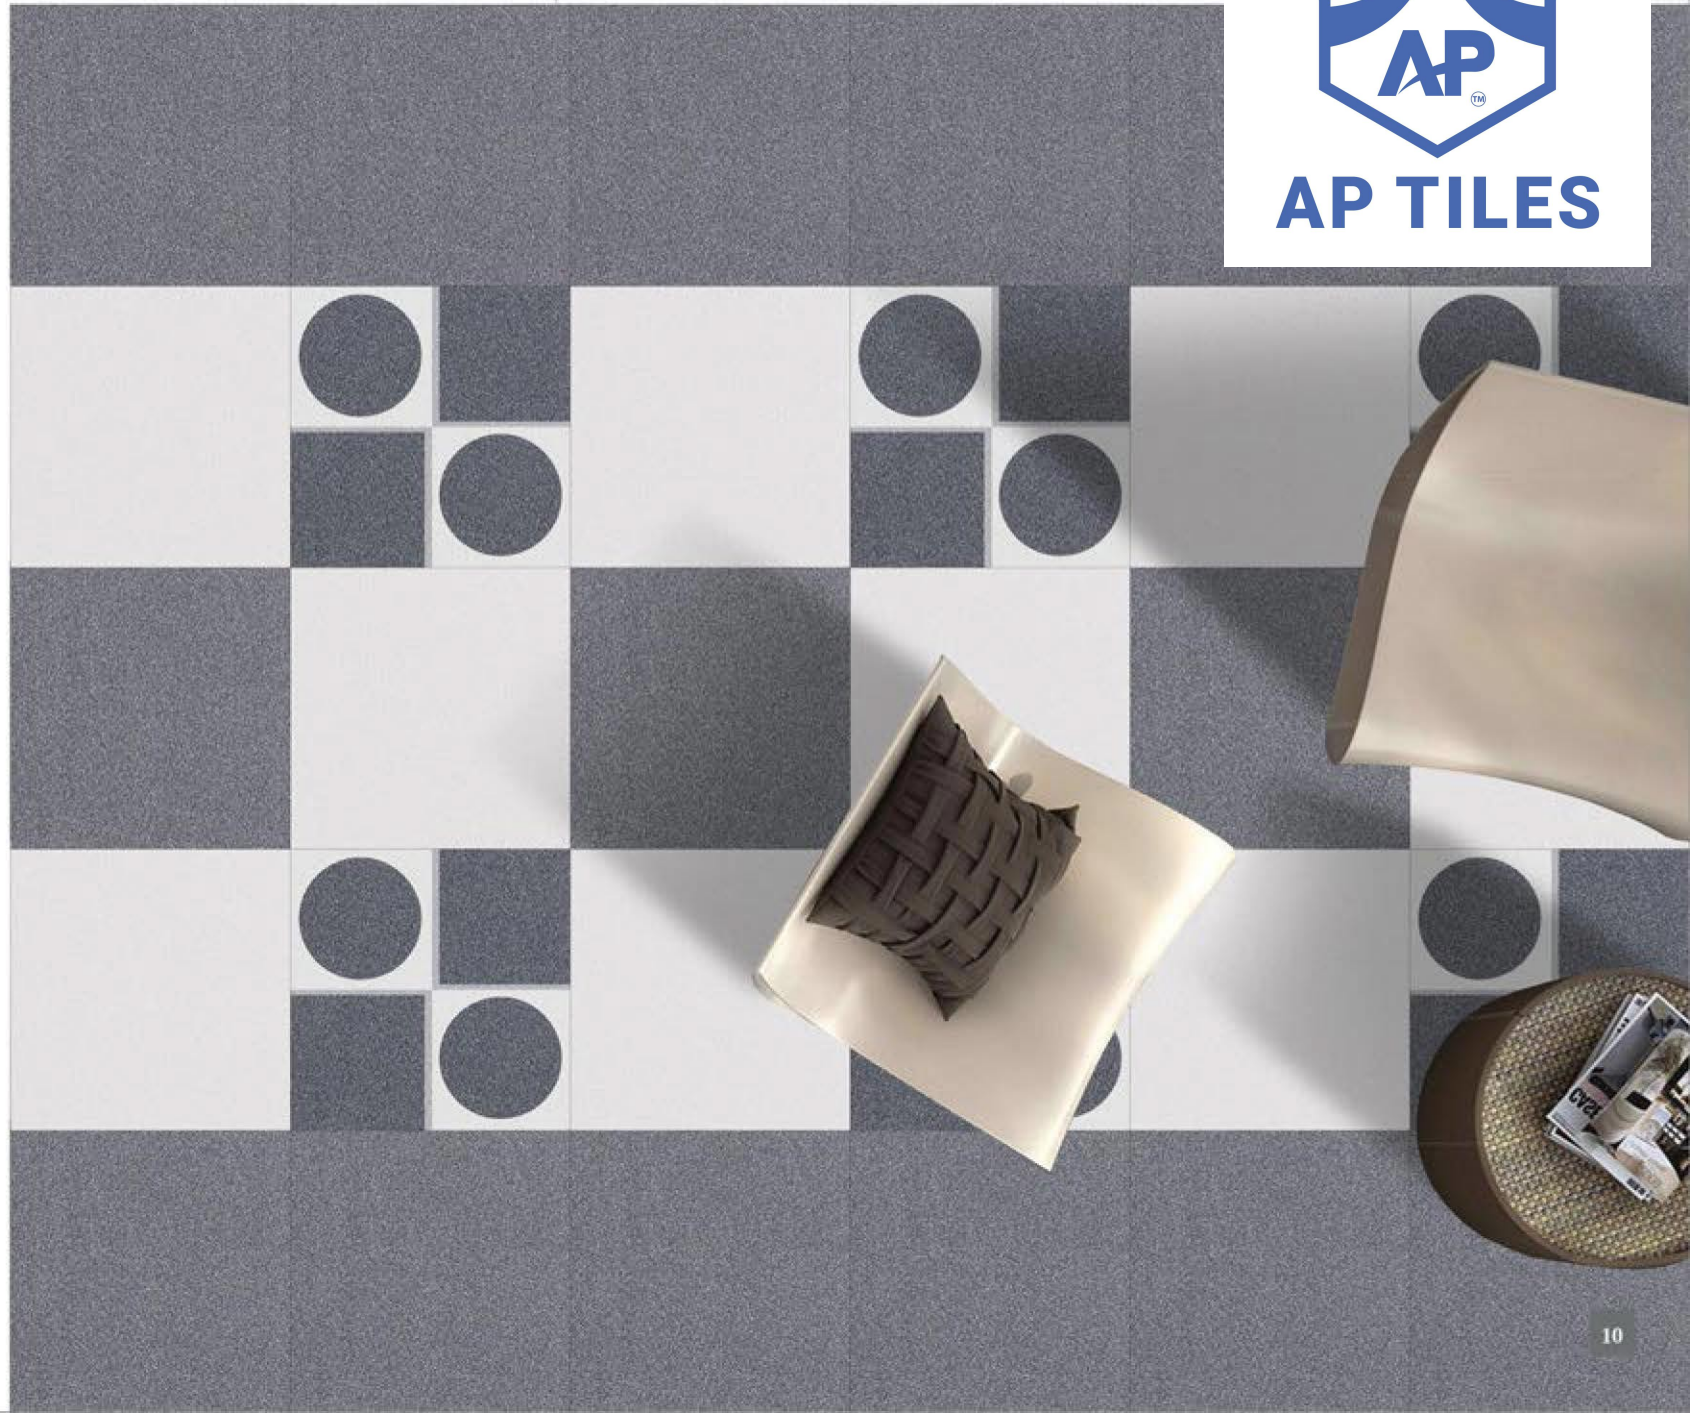


400  
X400

PLAIN  
SERIES



AP TILES

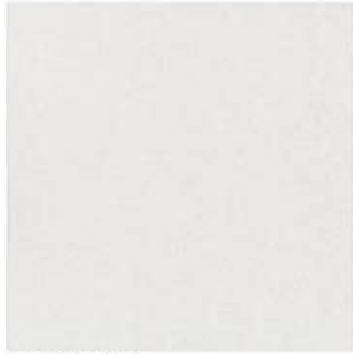

AGRO WHITE



AGRO MULTI



AGRO BLACK



*Creative thinking inspires ideas.*

400  
X400


PLAIN  
SERIES



AP TILES




CANDY LIGHT

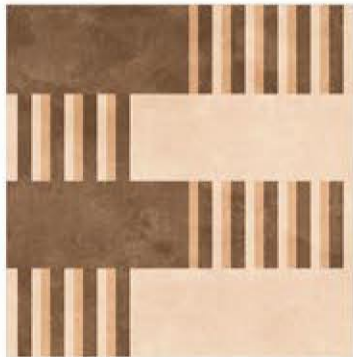

CANDY HL



CANDY DARK

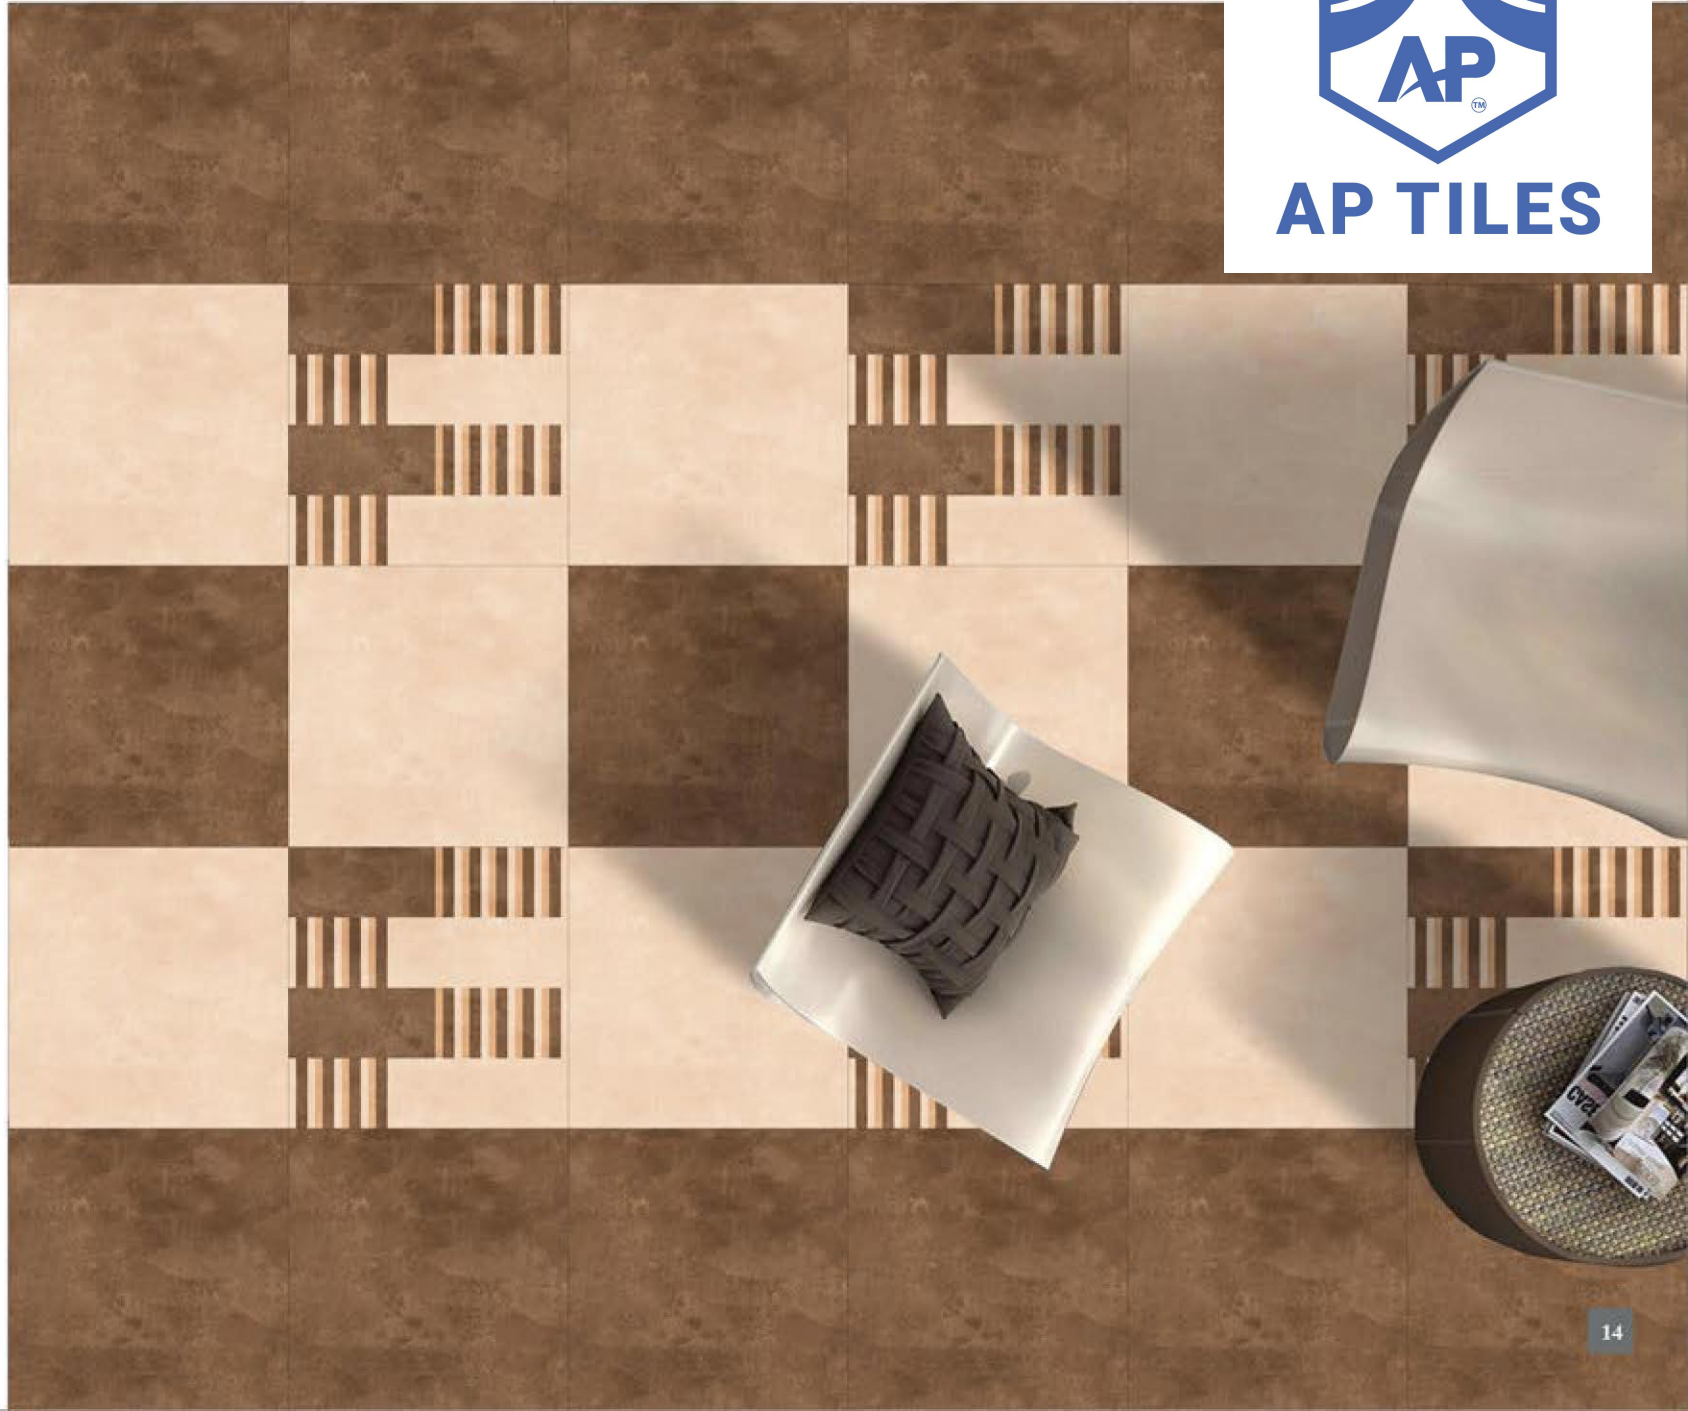

400  
X400

PLAIN  
SERIES



DONA BROWN



AP TILES




DONA BLACK

400  
X400

PLAIN  
SERIES



FOREST GREY

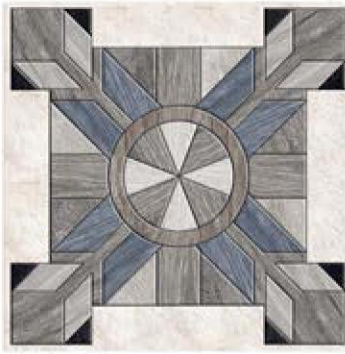

CRETA BLUE



FOREST BROWN



CRETA BROWN




FOREST GREEN



BINACA




AP TILES

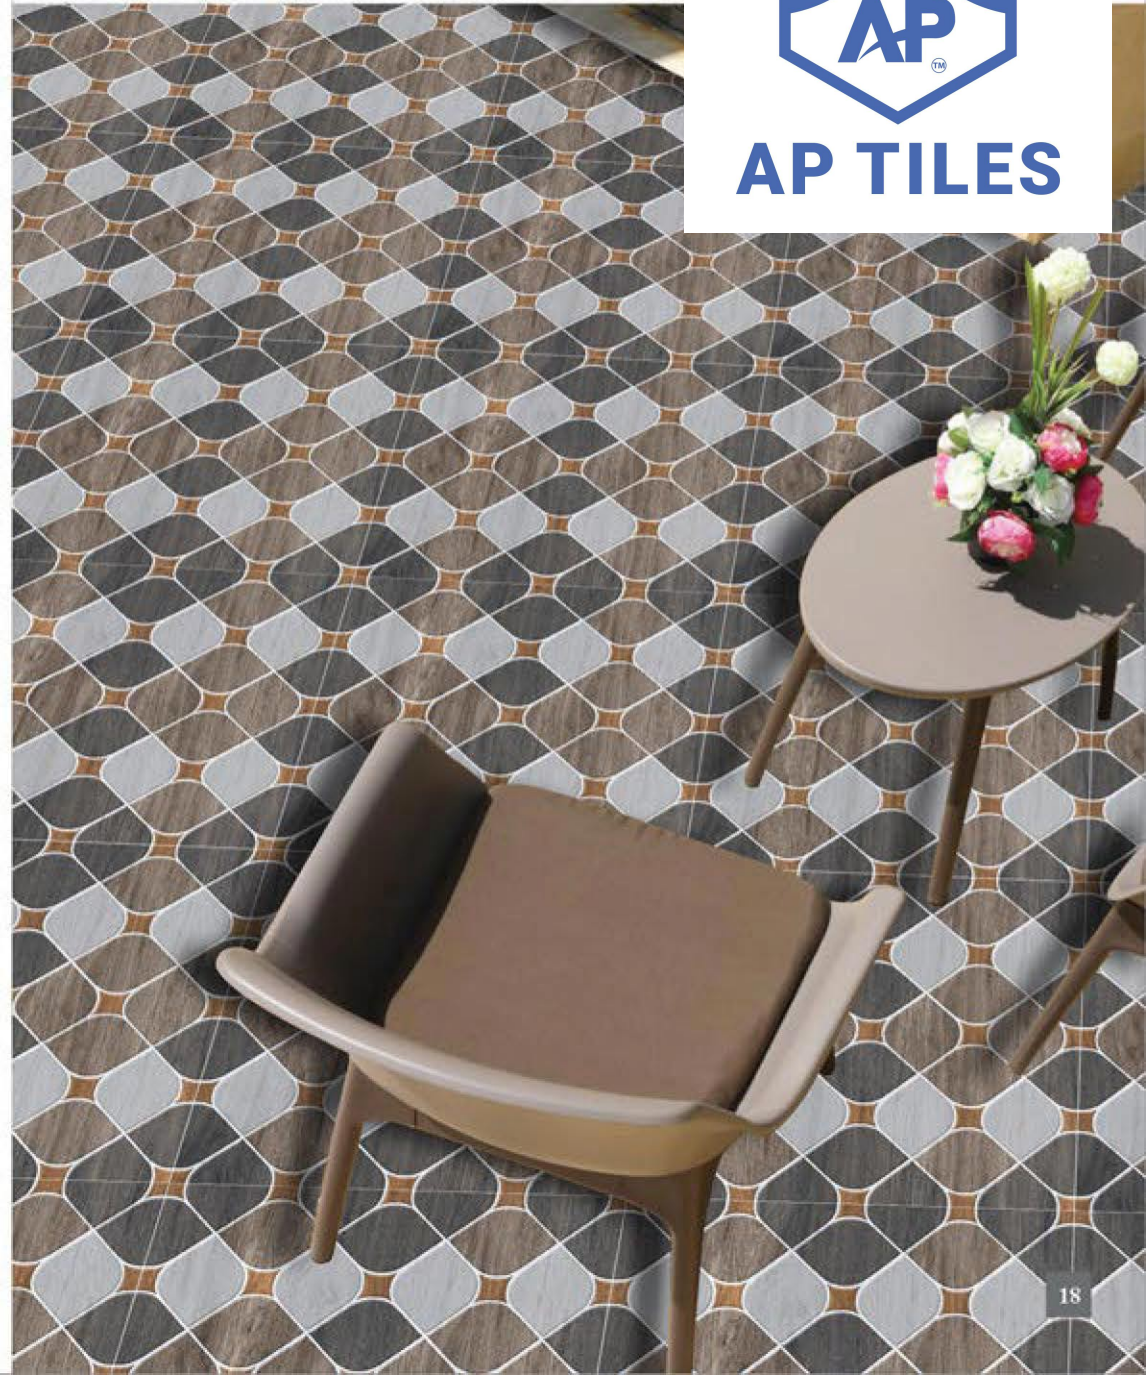


400  
X400

**PLAIN**  
SERIES

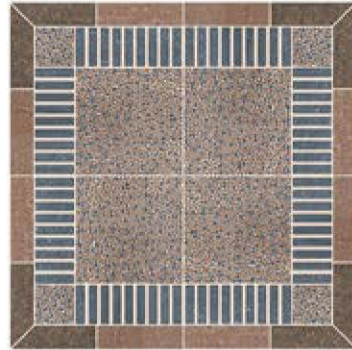

WOLGA

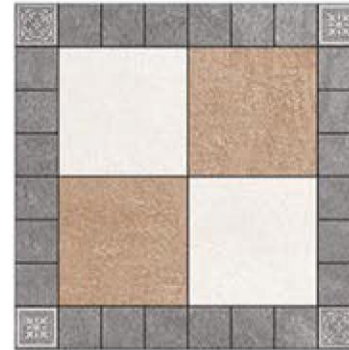

LUMBINI



**AP TILES**


400 X 400  
**PLAIN**  
SERIES



ATLANTA



TIMBER

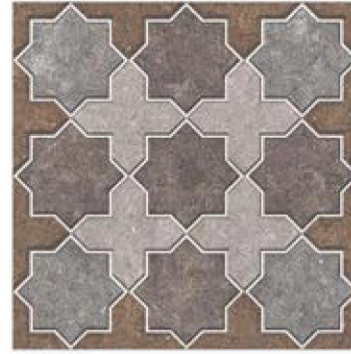

LEVISH



**AP TILES**



MORADO



400  
X400


**PLAIN**  
SERIES



**AP TILES**



ARIZONA LIGHT

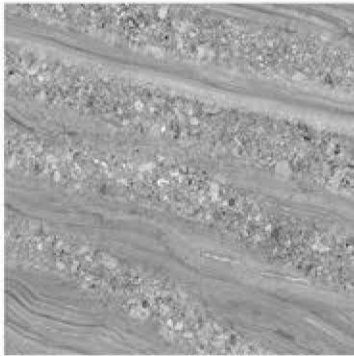

ARIZONA DARK



400  
X400

PLAIN  
SERIES



AP TILES



DUSTER LIGHT



DUSTER DARK



400  
X400

PLAIN  
SERIES



AP TILES



METAL CREMA



METAL BROWN



METAL VANILA



METAL COFFEE



400  
X400

**PLAIN**  
SERIES



WAVE LIGHT



WAVE DARK



**AP TILES**






**AP TILES**

## Tile Fixing Instructions

- Before fixing the tiles, lay them out in the desired pattern and make sure that they give an acceptable blend of shade, colour & design. Also make sure that the tiles are acceptable to your satisfaction. Please note that certain amount of shade and size variation is inherent in the manufacturing of ceramic products.
- For fixing these tiles, we recommend the use of **VITRIFIED** fixing adhesives. For best results, follow the tile fixing instruction provided along with the adhesives.
- For fixing **VITRIFIED** on the Floor using sand and cement, follow the instruction given below
  - Use cement and sand mortar in the ratio of 1:4. Add some water to create a consistent paste.
  - Do not add any further water to the mix once it is completed and use the same within one hour.
  - Apply a 20mm to 30mm layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and full bedding. Press gently for even adherence at back of the tile.

**DO NOT USE AN IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILE.**
- For fixing **Vitrified** on Dado, we recommend the use of tile fixing adhesive 'Gold Star' from IN & OUT Interior & Exterior. Please follow the manufacturer's instructions for the same. We do not recommend the use of sand and cement for fixing on Dado.
- Mark and lay out the tiles from the center of the area to be laid so that cut tiles, if any will be on the outer edges towards the walls.
- The nominal/ work size of the tile is as printed on the carton. It is advisable to maintain a gap of 5 mm to 8 mm between two tiles to allow for possible expansion as per ISO tolerance norms. This would give the coverage area as mentioned in the grouts.
- Complete the tiles laying process by pressing the cut **Vitrified** tiles firmly into place along the wall/floors.
- Allow 3 to 4 days for bed curing. After this period, fill the joints with cementitious or epoxy grouts from 15 to 20 mm depth.
- Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tiles with a soft and dry cloth for a clean surface. The tiles can also be cleaned with a mild acid (However Hydrofluoric acid and its derivatives should not be used), you can also use tile & stone cleaners.
- Please note that the company does not accept any liability in case of problems arising out of non-adherence to these fixing instructions.
- It is ideal to provide 5 mm to 8mm gap between tiles with the help of spacers.
- Kindly look for an arrow (  ) on the back of the tile and follow the laying pattern as shown below.
- THE COMPANY WILL BEAR NO RESPONSIBILITY AFTER THE TILES ARE FIXED. NOTHING IN THESE INSTRUCTIONS IS A SUBSTITUTE FOR GOOD WORKMANSHIP AND SUPERVISION.**



## TECHNICAL SPECIFICATION

Sr. NO.	Property	International Std. ISO 13006/EN Group Bla	VALUE
01	Deviation Length	+/-0.6%	+/-0.3%
02	Deviation in Thickness	+/-5%	+/-5%
03	Straightness of Sides	+/-0.5%	+/-0.5%
04	Rectangularity	+/-0.6%	+/-0.5%
05	Water Absorption	+/-0.5%	<0.1%
06	Mohs Hardness	>6	>6
07	Flexural Strength	>35N/mm <sup>2</sup>	>40N/mm <sup>2</sup>
08	Abrasion Resistance	<175mm <sup>3</sup>	<144mm <sup>3</sup>
09	Breaking Strength	1113 N	3500 N
10	Density / (g/cc)	>2.0	>2.4
11	Frost Resistance	Frost Proof	Frost Proof
12	Chemical Resistance	No Damage	No Damage
13	Thermal Shock Resistance	No Damage	No Damage
14	Colour Resistance	No Damage	No Damage
15	Thermal Expansion	<9x10 <sup>-4</sup>	<6x10 <sup>-4</sup> K <sup>-1</sup>
16	Stain Resistance	Resistant	Resistant
17	Moisture Expansion	Nil	Nil

## PACKING DETAIL

Size	Piece Per Box	Area Per Box (Approx)
400 x 400 mm	5	0.80 Sq. Mtr.

## APPLICATIONS

